

RINI

31-May-2016

1.0 LED

LED 7/10W | 350-500mA | COB 3-step | excl. power supply

CE IP44 0.3m P

white texture	154161W_
black texture	154161B_

LIGHT COLOUR

2700K >90CRI 420-590lm 18Vf	3
3000K >90CRI 470-640lm 18Vf	5
1800-2850K >90CRI 320-440lm 18Vf	9

ALWAYS USE
for power supplies see our catalogue

1.0 PAR16

Max. 35W | GU10 | 220-240VAC

CE IP44 0.9m P

white texture	154120W0
black texture	154120B0

OPTIONAL
for PAR16 lamps see our catalogue


1.0 MR16

QR-CBC51 Max. 35W | GU5.3 | 12V | excl. transformer


CE IP44 0.9m P

white texture	154110W0
black texture	154110B0


ALWAYS USE
for transformers see our catalogue

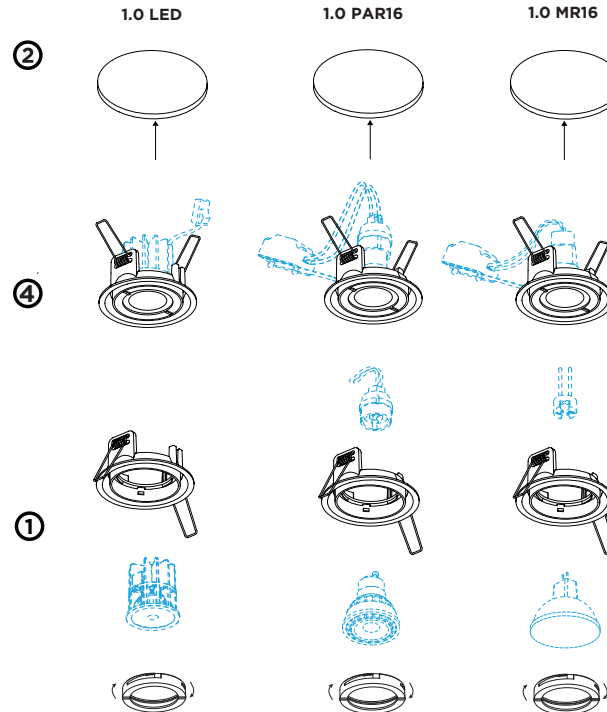

IP RATING when installed.
(Fixture is IP20 for the recessed
part & IP44 at the visible side)



DIMENSIONS

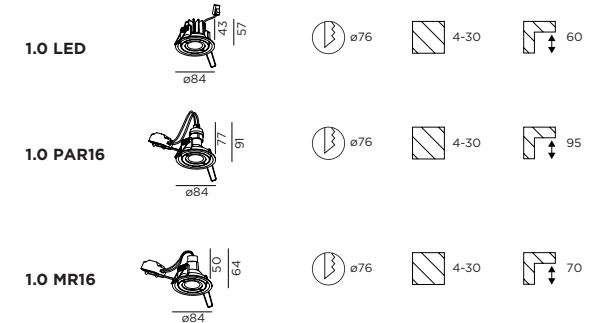


MOUNTING INSTRUCTION

- Put the illuminant in the assembled cover.
- Make a hole in the ceiling according to the prescribed dimensions.

3 POWER CONNECTION

SERIAL CONNECTION - for LED

Always use **POWER SUPPLY**
according to the specifications of the LED-module



PARALLEL CONNECTION - for PAR16



- Turn the springs and insert the fixture in the ceiling hole



FOR HALOGEN LAMPS:

- The mounting height for the luminaire should be more than 2.5m.
- luminaires not suitable for covering with thermally insulating material.
- luminaires not suitable for direct mounting on normally flammable surfaces (suitable only for mounting on noncombustiblesurfaces)



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducre bvba Kwadestraat 153 bus 2.1 8800 Roeselare

INSTALLATION
INSTRUCTIONS

PAGE 1/2

PB19-010-437-00

RINI

31-May-2016

2.0 LED

LED 7/10W | 350-500mA | COB 3-step | excl. power supply

CE IP44 0,3m P

white texture	154261W_
black texture	154261B_

LIGHT COLOUR

2700K >90CRI 420-590lm 18Vf	3
3000K >90CRI 470-640lm 18Vf	5
1800-2850K >90CRI 320-440lm 18Vf	9

ALWAYS USE
for power supplies see our catalogue

2.0 PAR16

Max. 35W | GU10 | 220-240VAC

CE IP44 0,9m P

white texture	154220W0
black texture	154220B0

OPTIONAL
for PAR16 lamps see our catalogue



2.0 MR16

QR-CBC51 Max. 35W | GU5.3 | 12V | excl. transformer

CE IP44 0,9m P


white texture	154210W0
black texture	154210B0

ALWAYS USE
for transformers see our catalogue

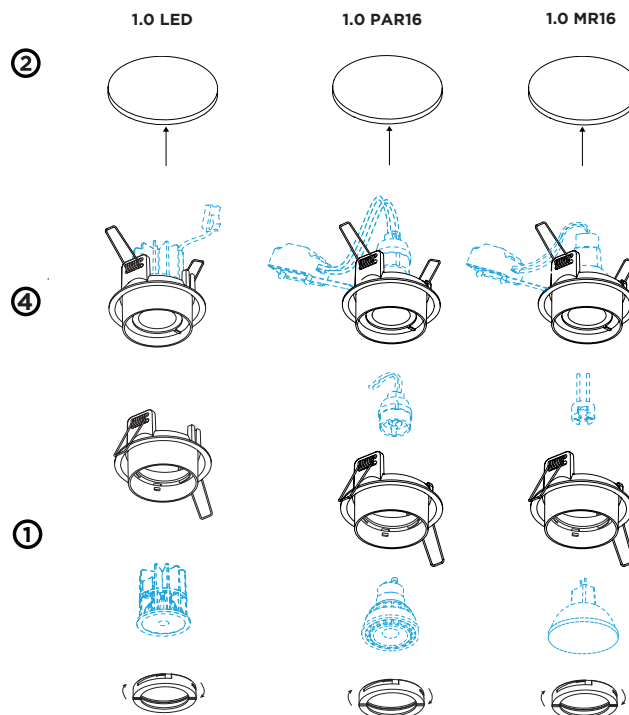

IP RATING when installed.
(Fixture is IP20 for the recessed part & IP44 at the visible side)

DIMENSIONS

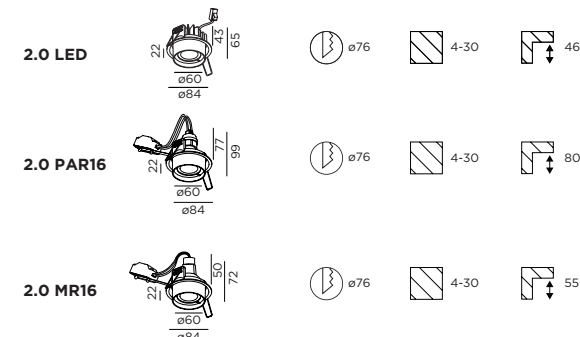


MOUNTING INSTRUCTION

- Put the illuminant in the assembled cover.
- Make a hole in the ceiling according to the prescribed dimensions.


POWER CONNECTION

SERIAL CONNECTION - for LED

Always use POWER SUPPLY
according to the specifications of the LED-module



PARALLEL CONNECTION - for PAR16



- Turn the springs and insert the fixture in the ceiling hole



FOR HALOGEN LAMPS:

- The mounting height for the luminaire should be more than 2.5m.
- luminaires not suitable for covering with thermally insulating material.
- luminaires not suitable for direct mounting on normally flammable surfaces (suitable only for mounting on noncombustible surfaces)