

BEBOW

27-Feb.-2020

3.0

LED 35W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | phase-cut dim
opal cover | two circuits

CE IP20 0.3m

3000K | >90CRI | 1910lm
white texture
black texture

132284W5
132284B5

4.0


LED 48W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | phase-cut dim
opal cover + 2x spot | two circuits

CE IP20 0.3m

3000K | >90CRI | 2350lm
white texture
black texture

132264W5
132264B5



top view

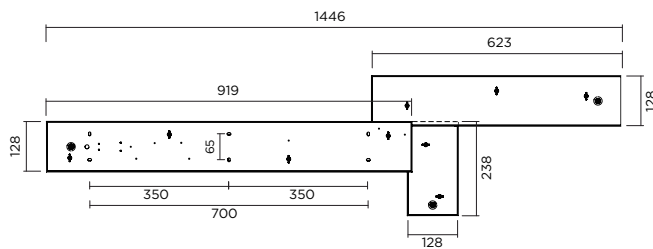

side view



DIMENSIONS

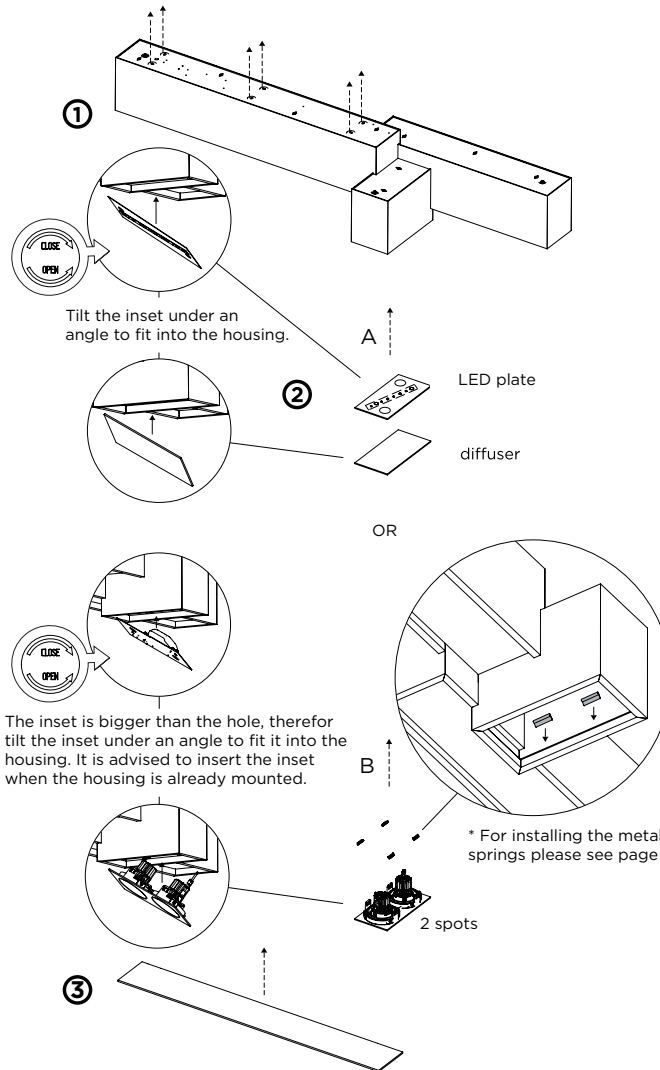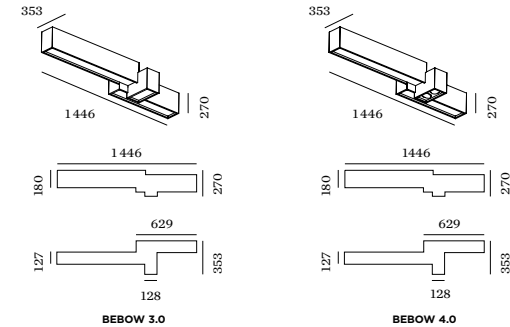

1 MOUNTING INSTRUCTION

Remove the diffuser of the long part and mount the Below to the ceiling with screws.

2 POWER CONNECTION

Connect the complete fixture to 220-240V
Please see the connection wiring diagram A on page 3.

middle area


A - Opal diffuser

Connect the inner LED-plate to the base of the middle part. Turn the buttons inside of the middle area to lock the LED plate to the base. Close the middle area with the diffuser.

B - Spots

Before mounting the spots click the 4 metal springs by hand into the small recessed groove*. Connect the 3 spots to the drivers and then insert into the middle area.

See serial connection wiring scheme below.



NOTE:

There is a possibility to make a separate circuit for the middle area for separate switching.
Please see the connection wiring diagram B on page 3.

3 Insert the diffuser of the long part back into the Below.



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducre bvba Spinnerijstraat 99/21 8500 Kortrijk

INSTALLATION
INSTRUCTIONS

PAGE 1/4

BEBOW

27-Feb.-2020

3.0

LED 35W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | phase-cut dim
opal cover | two circuits

CE IP20 0.3m

3000K | >90CRI | 1910lm
white texture
black texture

132484W5

132484B5

4.0

LED 48W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | phase-cut dim
opal cover + 2x spot | two circuits


CE IP20 0.3m

3000K | >90CRI | 2350lm
white texture
black texture

132464W5

132464B5



top view

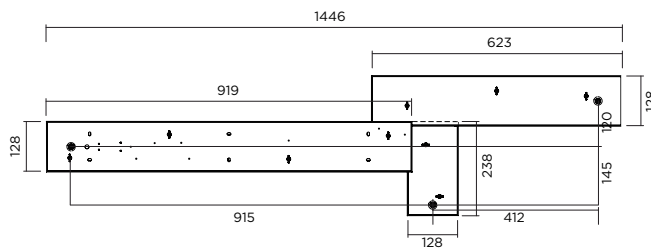

side view



DIMENSIONS

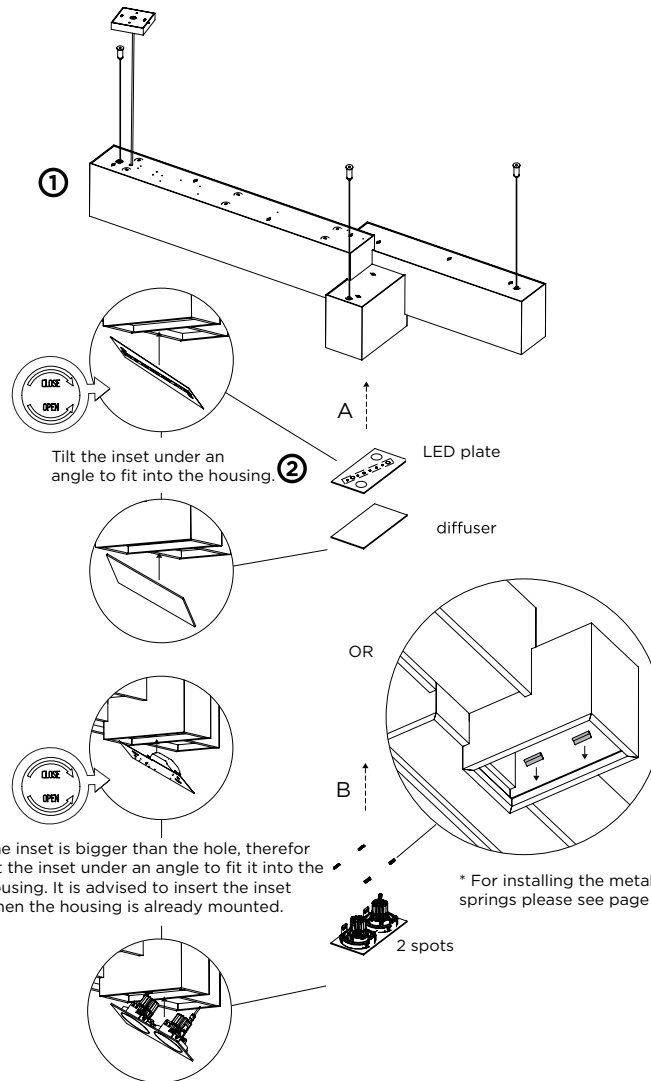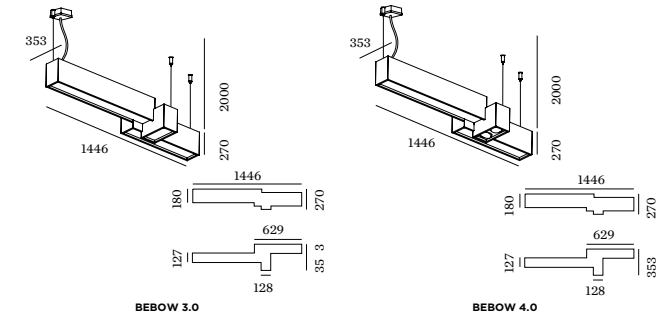

1 MOUNTING INSTRUCTION

Attach the Bebow to the ceiling with the 3 suspension wireropes.

2 POWER CONNECTION

Connect the complete fixture to 220-240V
Please see the connection wiring diagram A on page 3.

middle area


A - Opal diffuser

Connect the inner LED-plate to the base of the middle part. Turn the buttons inside of the middle area to lock the LED plate to the base. Close the middle area with the diffuser.

B - Spots

Before mounting the spots click the 4 metal springs by hand into the small recessed groove*. Connect the 3 spots to the drivers and then insert into the middle area.

See serial connection wiring scheme below.



NOTE:

There is a possibility to make a separate circuit for the middle area for separate switching.
Please see the connection wiring diagram B on page 3.



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducre bvba Spinnerijstraat 99/21 8500 Kortrijk


INSTALLATION
INSTRUCTIONS

PAGE 2/4


BEBOW

27-Feb.-2020

wiring diagram A:

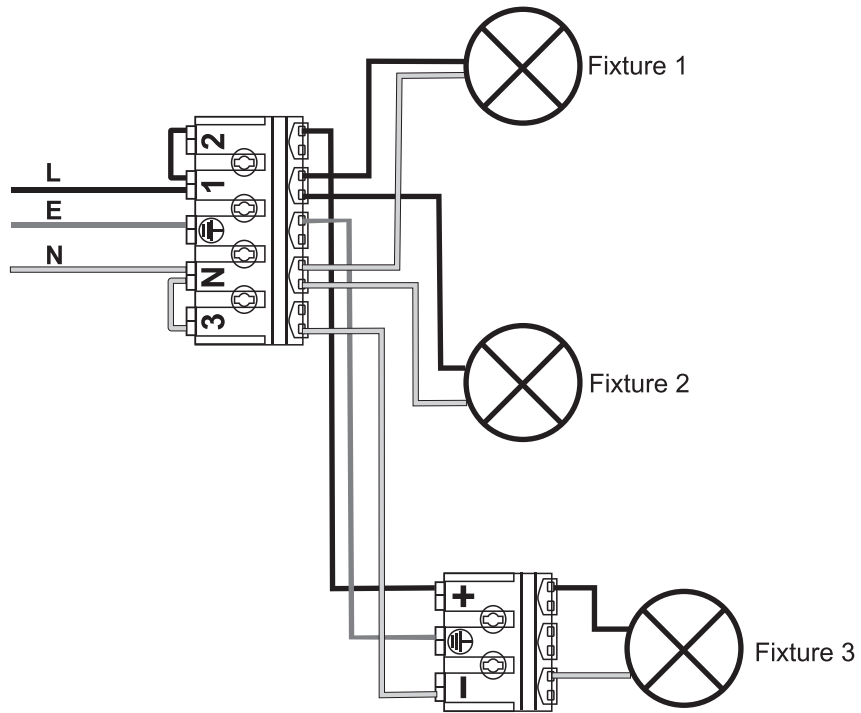


wiring diagram B:

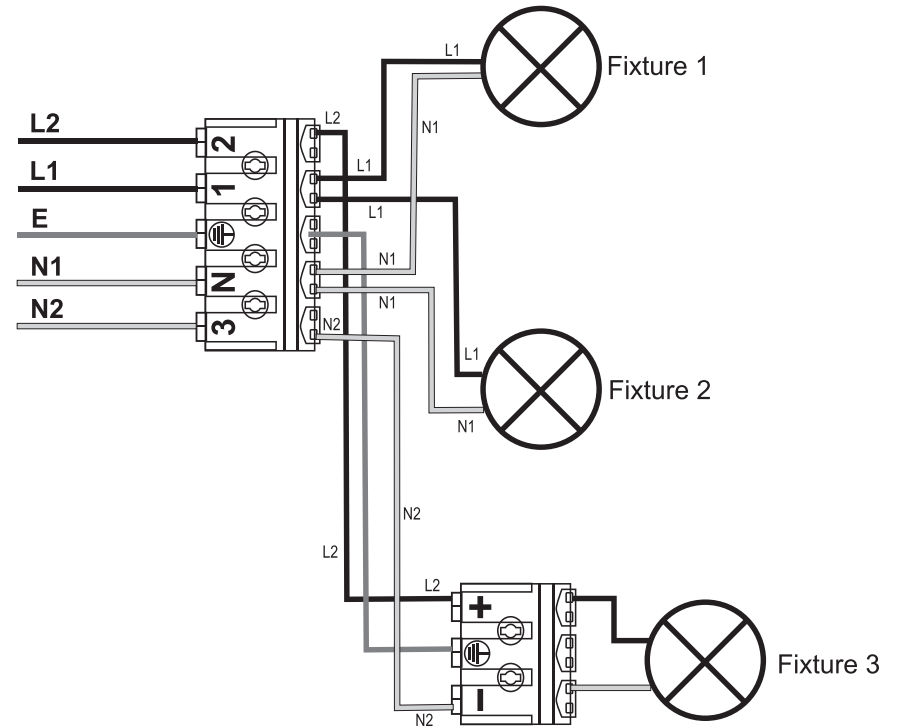

BEBOW


27-Feb.-2020

* CORRECT INSTALLATION OF THE METAL SPRINGS.

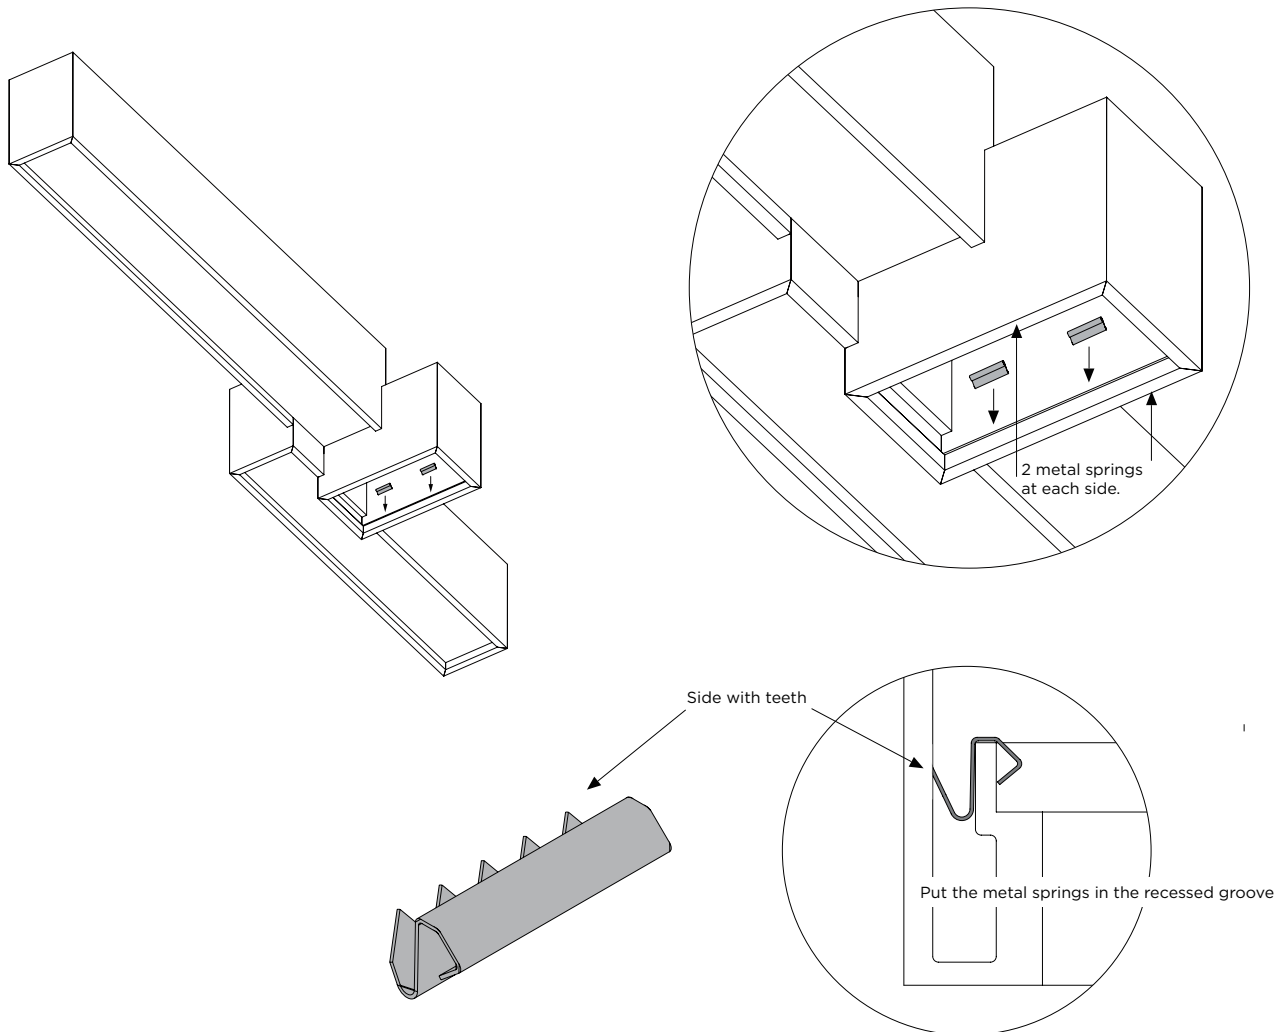


Click the 4 metal springs by hand into the small recessed groove as shown. The side with teeth should touch the inner wall of the Bebow.

BEBOW 1.0

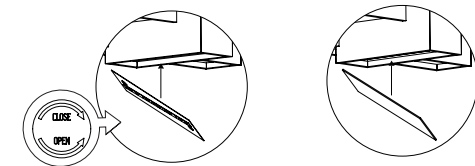

When the 4 metal springs are fixed in the recessed groove, the LED plate and opal diffuser can be installed. It is advised to first mount the Bebow housing to the ceiling and install the LED plate and opal diffuser next. Tilt both components under an angle to fit them into the housing as shown.

BEBOW 2.0

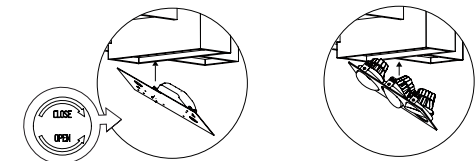

When the 4 metal springs are fixed in the recessed groove, the driver and spot inset can be installed. It is advised to first mount the Bebow housing to the ceiling and install the driver and spot inset next. Tilt both components under an angle to fit them into the housing as shown.