







RON

CEILING RECESSED

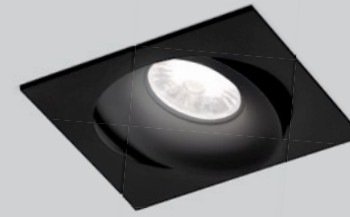

1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
round cut-out for mounting

0.36kg IP20 35° 36°

102-104 35°/35° 355° 90

4-25

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated
round cut-out for mounting

0.30kg IP20 35°

102-104 35°/35° 355° 75

4-25

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
round cut-out for mounting

0.34kg IP20 35°

102-104 35°/35° 355° 100

4-25

CODE	
111161W	111161B


LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/710 >90	3
3000K	570/770 >90	5
1800-2850K 16V	330/450 >95	9

CODE	
111110W0	111110B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/710 >90	3
3000K	570/770 >90	5
1800-2850K 16V	330/450 >95	9

CODE	
111120W0	111120B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/710 >90	3
3000K	570/770 >90	5
1800-2850K 16V	330/450 >95	9



For wireless dimming compatible with Amazon Echo Plus, Philips Hue and Homee see page 241.

ALWAYS USE

power supply | 500mA

CODE	
10W	90214405
15W dim	90224501
20W DALI	90244602

350mA power supplies on page 694

ALWAYS USE

power supply | 12V

CODE	
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 699

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701