






# BEBOW

## CEILING SURFACE



p. 445

DESIGNED BY  
S&R CORNELISSEN

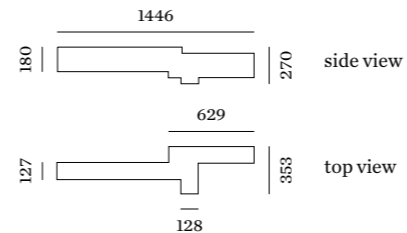

### 3.0

LED 44W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover | two circuits  
aluminium powder coated  
opal PMMA cover

8.00kg | IP20 | 0.3

3000K | >90 CRI | 1780lm

	CODE
	132284W5
	132284B5

### 4.0

LED 53W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover + 2x spot | two circuits  
aluminium powder coated  
opal PMMA cover

8.30kg | IP20 | 0.3

3000K | >90 CRI | 2720lm

	CODE
	132264W5
	132264B5