




DINOR

CEILING SUSPENDED

DESIGNED BY
3HDRAFT



ø380


1.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim
aluminium wet painted

0.90 kg | IP20 | ±0,3°

1800-2850K | >90 CRI | 510lm

CODE	
	255189RW9
	255189GW9
	255189OK9
	255189OB9



ø570


2.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim
aluminium wet painted

1.30 kg | IP20 | ±0,3°

1800-2850K | >90 CRI | 510lm

CODE	
	255289RW9
	255289GW9
	255289OK9
	255289OB9



ø760


3.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
phase-cut dim
aluminium wet painted

2.30 kg | IP20 | ±0,3°

1800-2850K | >90 CRI | 510lm

CODE	
	255389RW9
	255389GW9
	255389OK9
	255389OB9

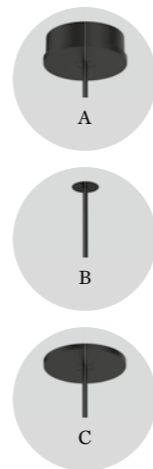

ALWAYS USE

A | Single suspension
ceiling base round

CODE	
	90052022
	90052021

B | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

CODE	
	90015195

C | Single ceiling base semi recessed

CODE	
	90052026
	90052027