




SELO
CEILING SUSPENDED

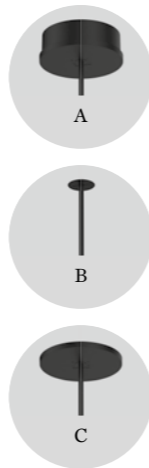


1.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
incl. PS | phase-cut dim
porcelain

0.80 kg | IP20 | 0.3m

1800-2850K | >90 CRI | 510lm

CODE
235189W9



2.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
incl. PS | phase-cut dim
porcelain

0.96 kg | IP20 | 0.3m

1800-2850K | >90 CRI | 510lm

CODE
235289W9



3.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step low flicker
incl. PS | phase-cut dim
porcelain

0.80 kg | IP20 | 0.3m

1800-2850K | >90 CRI | 510lm

CODE
235389W9

ALWAYS USE

A | Single suspension
ceiling base round

CODE
90052022
90052021

B | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

CODE
90015195

C | Single ceiling base semi recessed

CODE
90052026
90052027