

CITY

12-Feb.-2020

1.6

LED 13W | 220-240VAC | 50-60Hz | PCB 3-step low flicker | phase cut dim

CE P44 0.3m P

white texture

115184W_

LIGHT COLOUR

2700K | >90CRI | 770lm

3

3000K | >90CRI | 840lm

5

2.6

LED 18W | 220-240VAC | 50-60Hz | PCB 3-step low flicker | phase cut dim

CE P44 0.3m P

white texture

115284W_

LIGHT COLOUR

2700K | >90CRI | 1160lm

3

3000K | >90CRI | 1260lm

5

3.5

LED 32W | 220-240VAC | 50-60Hz | PCB 3-step low flicker | phase cut dim

CE P44 0.3m P

white texture

115384W_

LIGHT COLOUR


2700K | >90CRI | 1730lm

3


3000K | >90CRI | 1850lm

5


①



③

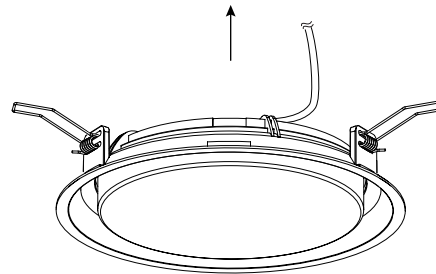

DIMENSIONS

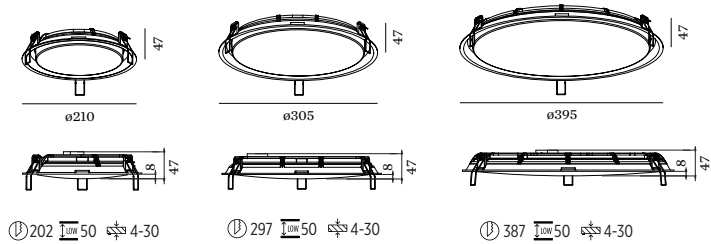


CITY 1.6


CITY 2.6

CITY 3.5

MOUNTING INSTRUCTION

- ① Make a hole in the ceiling according to the prescribed dimensions.
 - ② **POWER CONNECTION**
connect directly to 220-240VAC
- 
- ③ Push the springs up and insert the fixture into the ceiling hole.

IP20



IP RATING

When installed: IP20 for the recessed part and IP44 for the visible part.

The light source of the integrated LED is not replaceable. When the light source reaches its end of life the whole luminaire should be replaced.



Caution: risk of electric shock



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducré bvba Spinnerijstraat 99/21 8500 Kortrijk

INSTALLATION
INSTRUCTIONS