DOCUS SUSPENDED

13-Sep.-2018

2.0 | 3.0 LED

LED 8W | 220-240VAC | 50-60Hz | COB 3-step | incl. PS | phase-cut dim

CE ⏚ IP20 ◖0,3m ⟨36°

2.0
200mm

	white texture	207564W_
	aluminium brushed	207564L_
	gold	207564G_
	copper	207564P_
	black texture	207564B_

3.0
300mm

	white texture	207664W_
	aluminium brushed	207664L_
	gold	207664G_
	copper	207664P_
	black texture	207664B_

LIGHT COLOUR

2700K	>90CRI	420lm	3
3000K	>90CRI	440lm	5
1800-2850K	>95CRI	360lm	9

2.0 | 3.0 PAR16

📐 max. 35W | GU10 | 100-240VAC | 50-60Hz

CE ⏚ IP20 ◖0,9m

2.0
200mm

	white texture	207520W0
	aluminium brushed	207520L0
	gold	207520G0
	copper	207520P0
	black texture	207520B0

3.0
300mm

|		
	white texture	207620W0
	aluminium brushed	207620L0
	gold	207620G0
	copper	207620P0
	black texture	207620B0

OPTIONAL
for PAR16 lamps see our catalogue

* For this product, the cable with a plug that comes with the LED module is not needed. Please remove it first and then use the LED module.

not needed *(this notification refers to the part of the cable)*

LED   PAR16

⑤

③ B   B

② A   A

B   B

A   A

mount LED module:

①

⑥

## DIMENSIONS

ø84
29
max. 2500
200|300
67 67
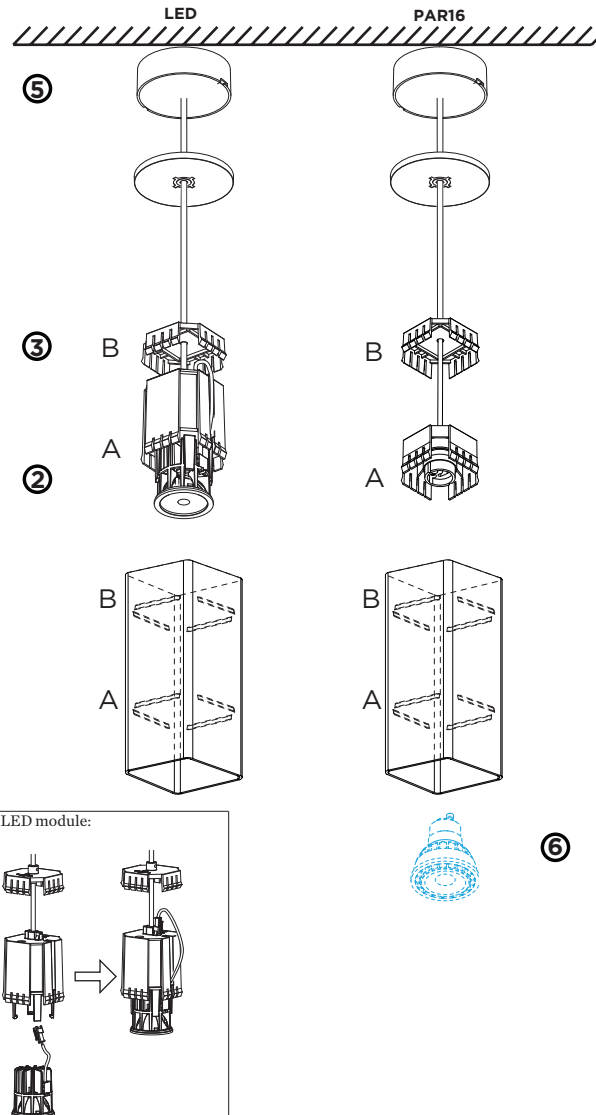
MOUNTING INSTRUCTION

① ONLY FOR LED: mount the LED module into the suspension set.

② Insert part A until it clicks in the lower part of the cover

③ Insert part B until it clicks in the higher part of the cover

④ **POWER CONNECTION**

Connect wiring to the power supply (for LED)
or to terminal block (for PAR16)

PARALLEL CONNECTION

220-240V
N ⏚ L   fixture 01   fixture 02   fixture . .
L N   L N   L N

⑤ Mount the ceiling base on the celing

(You have to turn the cover counterclockwise a quarter in order to loosen it from the ceiling base and mounting back on is by turning clockwise.)

⑥ ONLY FOR PAR16
Insert the lamp

PB19-010-452-00

WEVER & DUCRÉ
LIGHTING

INSTALLATION INSTRUCTIONS

NEW CEILING
BALDACHIN ROUND

29-Feb.- 2016

CE ⊕ IP20

White texture		90052005
Black texture		90052006

mounting plate dimension:

90

120

① Mounting plate

Baldachin cover

A

B
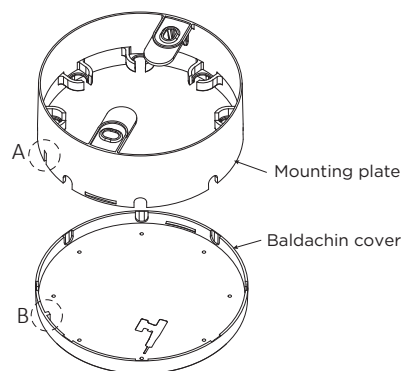
⚠ **WARNING: the slot A and raised section B should be aligned when installation.**

Wiring method 1:

(Check page 2 for overall view details)

②

⑤

④

strain relief

adjusting knob

When the cable length is determined, please remember to tighten it.

⑦

Wiring method 2:

②

③ ← soft plastic grommet

⑤

④

⑦

DIMENSIONS

45

124

MOUNTING INSTRUCTION

① Remove the mounting plate from the baldachin cover. Fix the mounting plate on the ceiling with screws.

* There are two wiring method:
Method 1: the lamp cables go through the wall of the Mounting plate;
Method 2: the lamp cables go through the bottom of the Baldachin cover.

② Make holes on the Baldachin cover for lamp cables.

③ Put the grommets into the holes. (This step applies to the Method 2.)

④ Adjust the cables of luminaire to desired length, tighten the strain reliefs

⑤ Connect the luminaire cables into the terminals.

⑥ **POWER CONNECTION**

When the luminaire number is less than 5

N

L

When the luminaire number is greater than 4

N

L

Baldachin cover earthing connector:

⑦ Hang the strain reliefs on the holders.

NEW CEILING

BALDACHIN ROUND

29-Feb.- 2016

Wiring method 1:

⑧

Cable parallel with ceiling.

Wiring method 2:

⑧ Push the Baldachin cover up to cover the mounting plate.

① ② ③

Cable is hanging loose (in a loop).

A

B

A

B
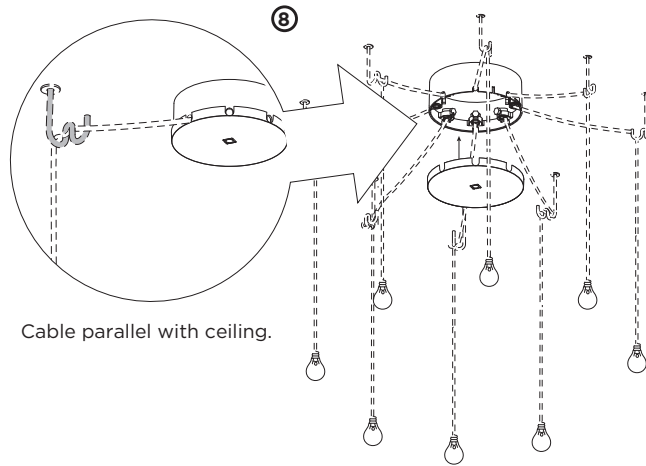
Mounting plate
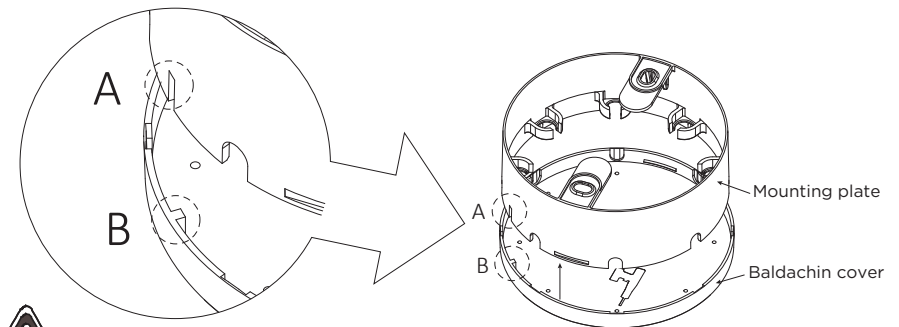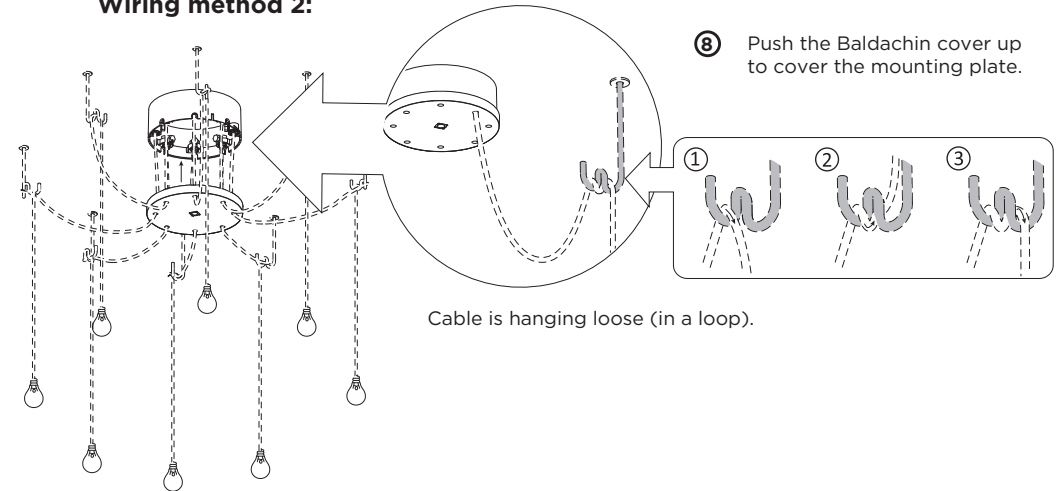
Baldachin cover

⚠ WARNING: When push the baldachin cover up to the mounting plate, please make sure the slot A and raised section B are aligned.
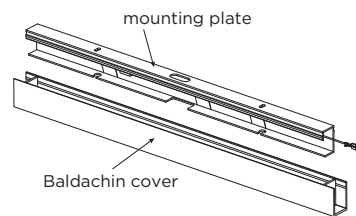
BALDACHIN

27-Jul.- 2016

600MM

CE ⊕ IP20

White texture		90052007
Black texture		90052008

mounting plate dimension:
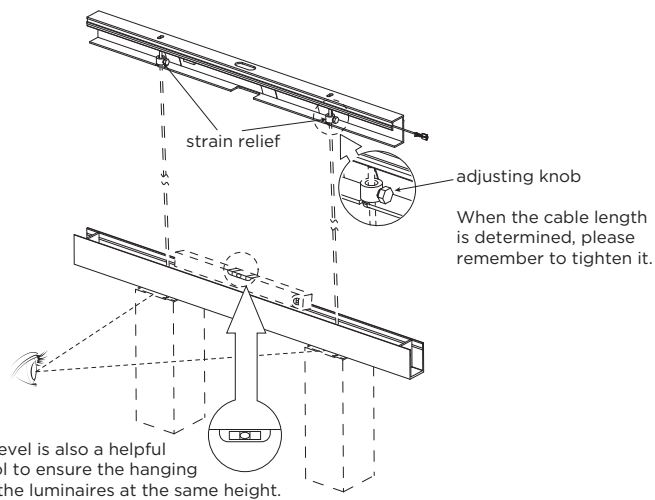
540
27
300

① mounting plate

Baldachin cover

② strain relief

adjusting knob

When the cable length is determined, please remember to tighten it.

A level is also a helpful tool to ensure the hanging of the luminaires at the same height.
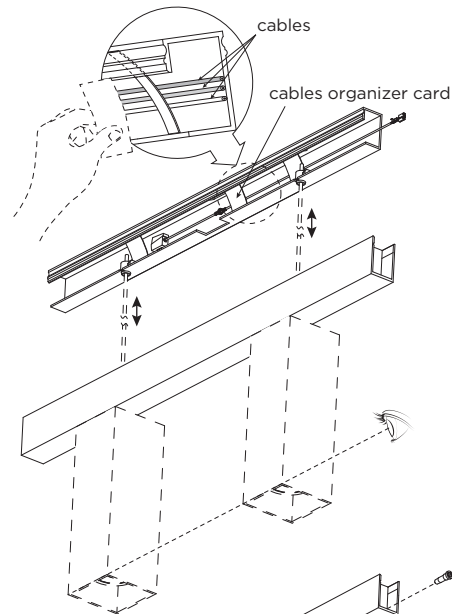
③ cables
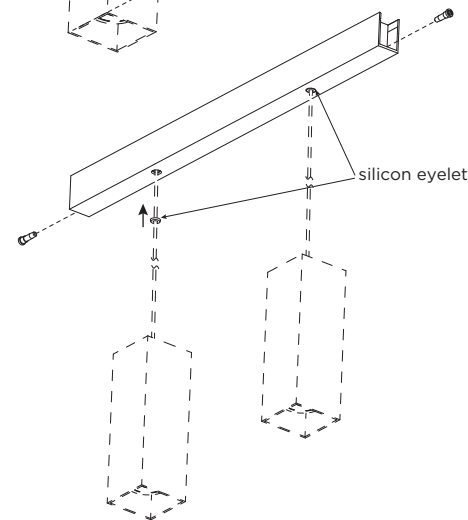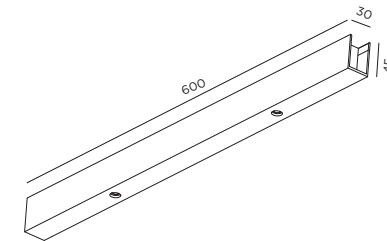
cables organizer card

⑤

⑥ silicon eyelet

DIMENSIONS

30
600
45

MOUNTING INSTRUCTION

① Remove the mounting plate from the baldachin cover.

② Adjust the cable of lights to desired length.
If you need the lights be horizontal alignment, the baldachin cover can be a helpful judgement tool.

③ Fix the mounting plate on the ceiling with screws.
If you need to align the orientation of the light, fine-tuning of strain relief direction to achieve adjustment.

④ **POWER CONNECTION**

Connect the power

N

L

Baldachin cover earthing plug:

⑤ Lock the baldachin cover on the mounting plate with two plastic screws.

⑥ Put the silicon eyelets in the cable outlets.

PB19-010-413-00

WEVER & DUCRÉ LIGHTING

INSTALLATION INSTRUCTIONS

BALDACHIN

27-Jul.- 2016

900MM

CE ⊕ IP20

White texture		90052009
Black texture		90052010

mounting plate dimension:

840

27

600

①

mounting plate

Baldachin cover

②

strain relief

adjusting knob

When the cable length is determined, please remember to tighten it.

A level is also a helpful tool to ensure the hanging of the luminaires at the same height.

③

cables

cables organizer card
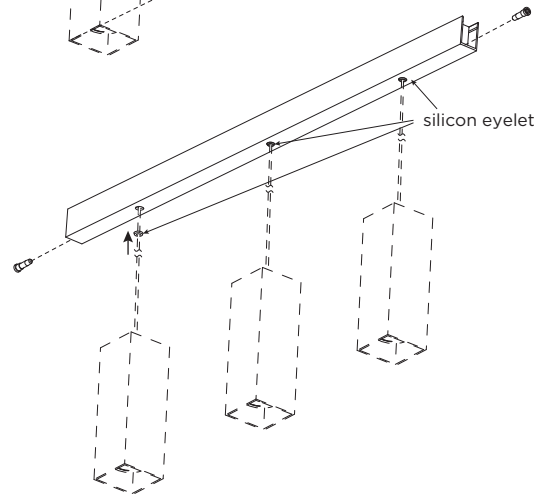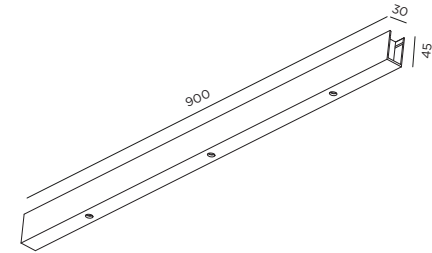
⑤

⑥

silicon eyelet

DIMENSIONS

30

45

900

MOUNTING INSTRUCTION

① Remove the mounting plate from the baldachin cover.

② Adjust the cable of lights to desired length.
If you need the lights be horizontal alignment, the baldachin cover can be a helpful judgement tool.

③ Fix the mounting plate on the ceiling with screws.
If you need to align the orientation of the light, fine-tuning of strain relief direction to achieve adjustment.

④ **POWER CONNECTION**

Connect the power

N

L

N / L N / L N / L

Baldachin cover earthing plug:

⊕

⑤ Lock the baldachin cover on the mounting plate with two plastic screws.
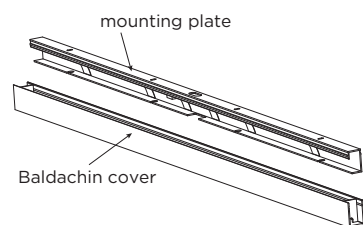
⑥ Put the silicon eyelets in the cable outlets.

PB19-010-464-00

WEVER & DUCRÉ
LIGHTING

www.weverducre.com

INSTALLATION INSTRUCTIONS

BALDACHIN

27-Jul.- 2016

1200MM

CE ⊕ IP20

	White texture	90052011
	Black texture	90052012

mounting plate dimension:

1140

27

300 300 300

①

mounting plate

Baldachin cover

②

strain relief

adjusting knob

When the cable length is determined, please remember to tighten it.

A level is also a helpful tool to ensure the hanging of the luminaires at the same height.

③

cables

cables organizer card

silicon eyelet

⑤

⑥

DIMENSIONS

30
45
1200

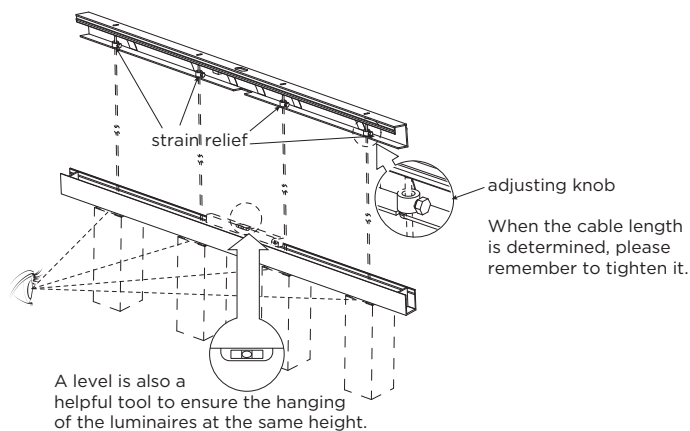**MOUNTING INSTRUCTION**
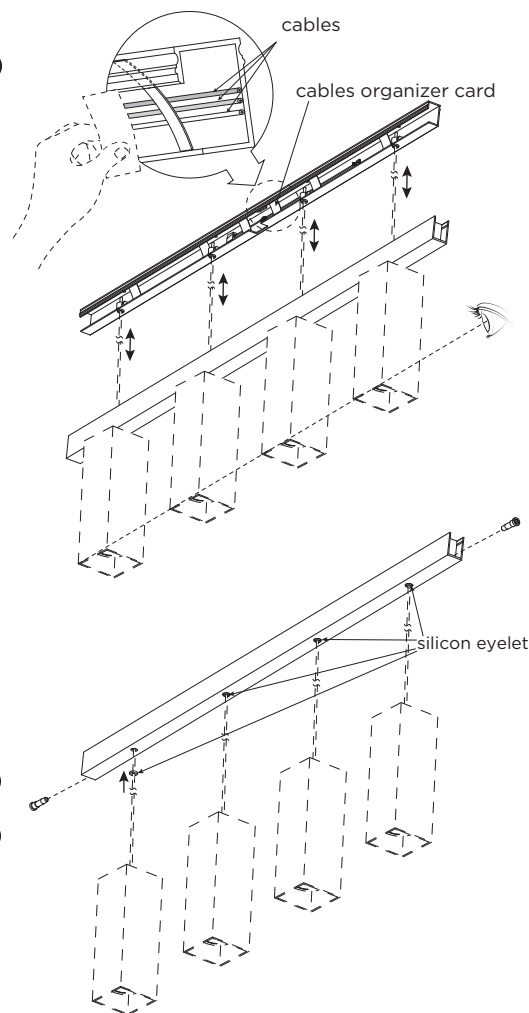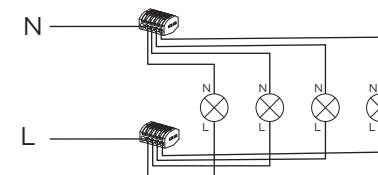
① Remove the mounting plate from the baldachin cover.

② Adjust the cable of lights to desired length.
If you need the lights be horizontal alignment, the baldachin cover can be a helpful judgement tool.

③ Fix the mounting plate on the ceiling with screws.
If you need to align the orientation of the light, fine-tuning of strain relief direction to achieve adjustment.

④ **POWER CONNECTION**

Connect the power

N

L

Baldachin cover earthing plug:

⊕

⑤ Lock the baldachin cover on the mounting plate with two plastic screws.

⑥ Put the silicon eyelets in the cable outlets.

BALDACHIN

27-Jul.- 2016

1500MM

CE ⏚ IP20

	White texture	90052013
	Black texture	90052014

mounting plate dimension:

1440

27

300 300 300 300

①

mounting plate

Baldachin cover

②

strain relief

adjusting knob

When the cable length is determined, please remember to tighten it.

A level is also a helpful tool to ensure the hanging of the luminaires at the same height.

③

cables

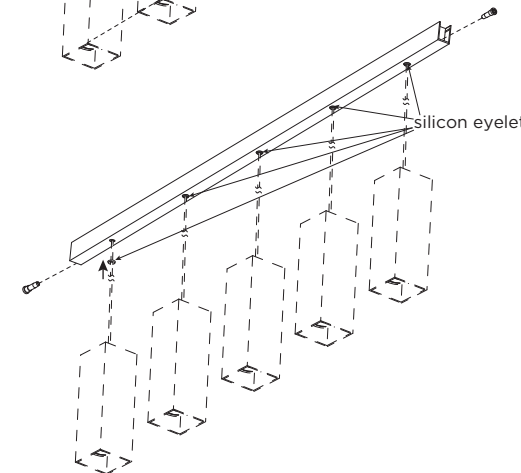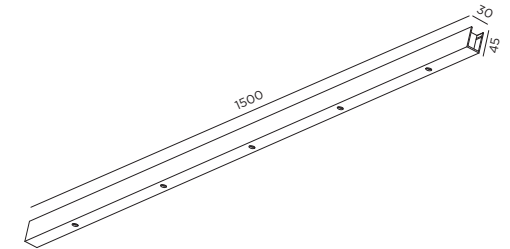cables organizer card
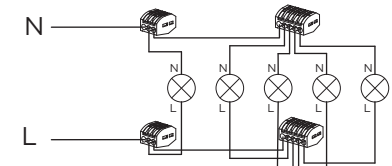
⑤

⑥

silicon eyelet

DIMENSIONS

30
45
1500

MOUNTING INSTRUCTION

① Remove the mounting plate from the baldachin cover.

② Adjust the cable of lights to desired length.
If you need the lights be horizontal alignment, the baldachin cover can be a helpful judgement tool.

③ Fix the mounting plate on the ceiling with screws.
If you need to align the orientation of the light, fine-tuning of strain relief direction to achieve adjustment.

④ **POWER CONNECTION**

Connect the power

N

L

Baldachin cover earthing plug:

⏚

⑤ Lock the baldachin cover on the mounting plate with two plastic screws.

⑥ Put the silicon eyelets in the cable outlets.

PB19-010-466-00

WEVER & DUCRÉ
LIGHTING

INSTALLATION INSTRUCTIONS